



For Advanced Analysis

InBody370s

Body Composition Analyzer

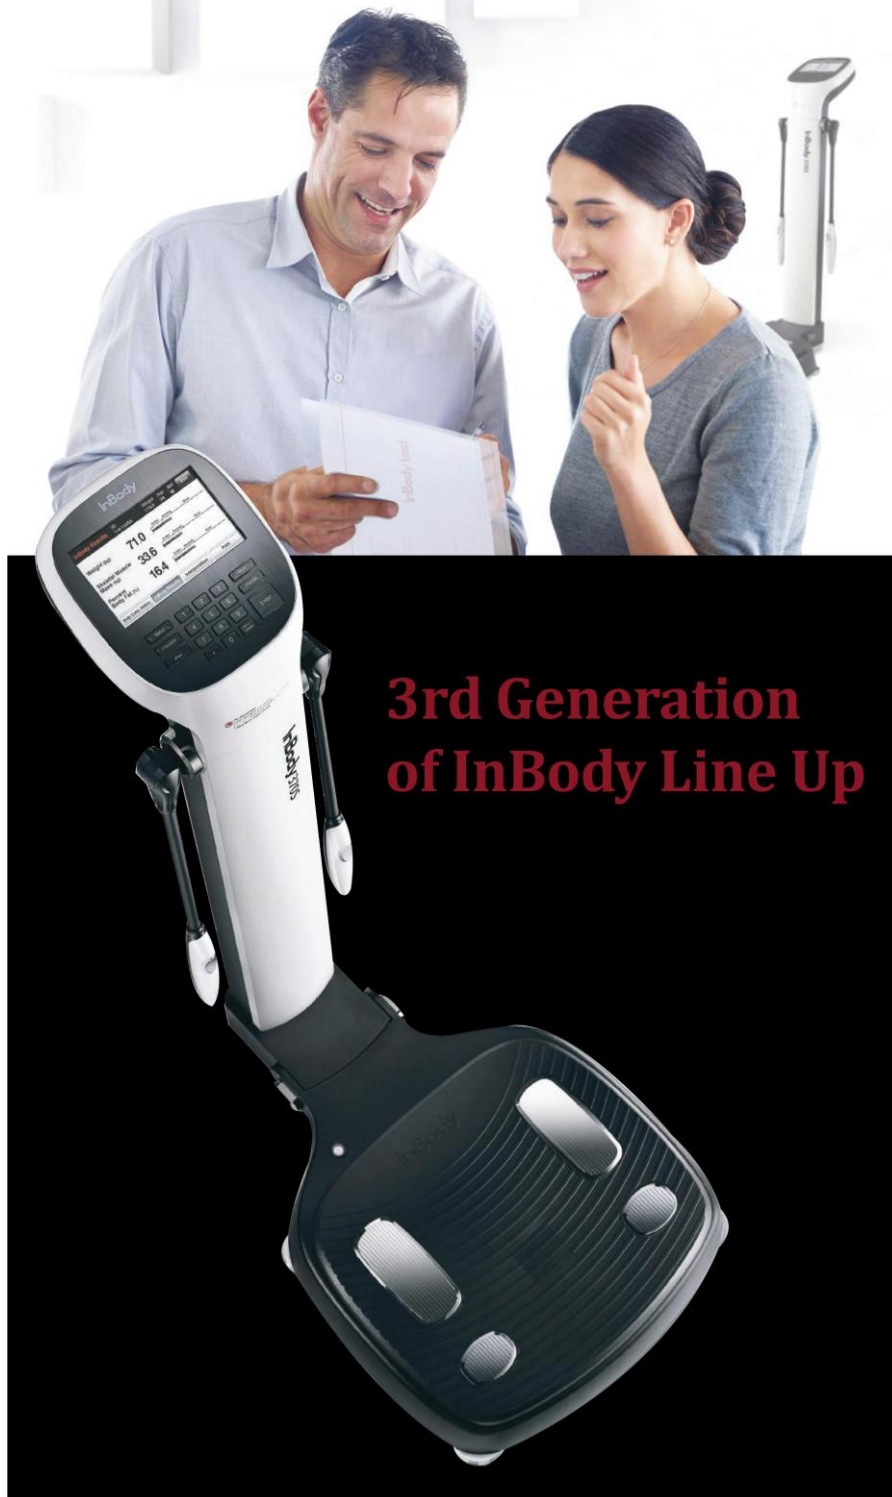




SMF-BIA (Patent registration number: US 8271079);
 Simultaneous Multi-Frequency Bioelectrical Impedance Analysis
Another innovative achievement for BIA technology



InBody370S provides research-level accuracy

- Hundreds of validation studies have proven InBody as one of the most accurate body composition analyzers.
- InBody has acquired over 80 patent rights across the globe for its unique and highly accurate technology .
- InBody holds numerous certifications from organizations such as NAWI and CE that assure research-level results.
- Scientifically Proven - InBody's BIA body composition analyzers show 98% correlation with DEXA, the gold standard.

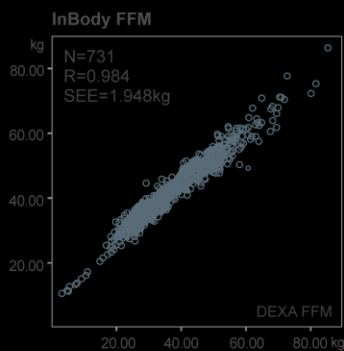


* Male: 343, Female: 388

	N	Minimum	Maximum	Mean	Std. Deviation
Age (years)	731	5.00	88.00	40.09	17.54
Height (cm)	731	106.50	193.00	162.42	10.43
Weight (kg)	731	17.30	118.30	60.60	13.59



- 3rd Generation of InBody Line Up**
- User-Friendly Interface with Voice Guidance
 - Electrical Noise Detection
 - Auto Printer Searching
 - SMF-BIA Technology (US Patent)
 - Stylish exterior



- Easy and Quick Measurement**
- Quick Measurement
 - Professional (Nurse-assisted) or Self Mode (Fully automated system)
 - QR Code for Self Interpretation
 - Troubleshooting for Basic Repair
 - Barcode Scanner



- Wireless Solution**
- Data Management Software
 - Stadiometer
 - Cloud Service Enabled



- Customization and Versatile Use**
- Result Sheet
 - Adjust Normal Range (BMI, PBF and WHR)
 - Thermal Result Sheet
 - Child Result Sheet
 - Carrying Case



- Enhanced Security**
- Auto Lock Display
 - HIPAA compliance*
- *Health Insurance Portability and Accountability Act



Other Specifications

Applied Rating Current	200 μ A (\pm 40 μ A)	
Adapter	Manufacture	BridgePower Corp.
	Model	BPM040S12F07
	Power Input	AC 100-240V, 50-60Hz, 1.2A
	Power Output	DC 12V, 3.4A
Display Type	480 × 800 7inch Color TFT LCD	
Internal Interface	Touchscreen, Keypad	
External Interface	RS-232C 4EA, USB HOST 2EA, USB SLAVE 1EA, LAN (10T) 1EA, Bluetooth 1EA, Wi-Fi 1EA	
Compatible Printer	Laser/Inkjet Printers (Printers recommended by InBody) * A list of printers compatible with the InBody can be found at http://www.inbodyservice.com	
Dimension	522 (W) × 874 (L) × 1059 (H): mm	
	20.6 (W) × 34.4 (L) × 41.7 (H) : inch	
Equipment Weight	26kg (57.3lbs)	
Testing Time	About 15 seconds	
Operation Environment	10 ~ 40°C, 30 ~ 75% RH, 70 ~ 106 kPa	
Storage Environment	-10 ~ 70°C, 10 ~ 80% RH, 50 ~ 106 kPa (No Condensation)	
Testing Weight Range	10 ~ 250kg (22.0 ~ 551.2lbs)	
Testing Age Range	3 ~ 99 years	
Height Range	95 ~ 220cm (3ft. 1.40in. ~ 7ft. 2.61in.)	